AI Workplace Occupancy Sensor

VS121

◆ Introduction

Milesight VS121, is an AI workplace sensor designed to monitor occupancy and utilization in modern workspace, which can reach up to 95% recognition rate[1] based on its AI algorithm. Milesight VS121 has dual versions transmitting data through LoRaWAN® or Ethernet for different applications.

Based on standard LoRaWAN® protocol, VS121 can work with Milesight LoRaWAN® gateway and mainstream LoRaWAN® network servers. They are equipped with Wi-Fi for easy configuration without any configuration tools.

With Ethernet transmission, VS121-P is available to provide more applications. Rich serial interfaces such as DI, DO, and RS485 are provided in VS121-P for various scenarios. VS121-P supports data push via HTTP(S)/MQTT(S) for easily integration and allows for remote management via Milesight DeviceHub or Milesight Development Platform.

VS121 can be used in workplaces, retail stores and airports, etc.



VS121 **VS121-P**

◆ Features

Shared Values

- Recognition rate is up to 95%[1] based on advanced AI identification and analysis technologies
- Wide installation height and detection range with two versions for various scenarios
- Compliant with GDPR without images collected, free from privacy concerns
- Support regional people counting, occupancy detection and dwell time detection
- Support up to 16 mapped regions for detection
- Allow for bi-directional line-crossing people counting and people flow analysis
- Smart U-turn counting to filter redundant counting of people wandering around the area
- Support people flow analysis to calculate the traffic from different directions
- Support normal or blur mode and privacy masks up to 8 regions
- Support local data storage and data retransmission to collect data securely
- Support scheduled detection

LoRaWAN® Version Only

- Equipped with Wi-Fi for web GUI configuration
- Support Milesight D2D protocol to enable ultra-low latency and directly control without gateway
- Function well with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud

PoE Version Only

- Support Milesight DeviceHub or Milesight Development Platform management remotely
- Adapt to more applications with rich industrial interfaces
- DC or PoE power supply optional
- High compatibility of data transmission via Ethernet port (HTTP/MQTT/HTTP API/HTTPS)
- BACnet/IP native integration for building management systems

◆ Specifications

Model	VS121	VS121-P
People Counting		
Field of View	190 ° Horizontal, 112 ° Vertical	
Installation Height	2.3m to 4m	
General Description		
Data Retransmission	Support 1000 data retransmission packets	MQTT(S): Support 1000 data retransmission packets HTTP(S): Up to 3 × 1000 data retransmission packets
Features		
Basic Features		
Regional People Counting & Dwell Time Detection	Up to 16 areas (up to 10 sides for each area) for regional people counting and dwell time detection	
Bi-Directional People Counting	Support	
Advanced Features		
U-turns Filtering	Filter redundant counting of people wandering in the bi-directional people counting areas	
People Flow Analysis	Calculate the traffic of different directions at most 4 edges	
Privacy Mask	Up to 8 privacy masks to cover certain areas	
Do for Overcrowding Alarm	Support	
DI for Unnecessary Filtering	Support	
LoRaWAN® Transmission		
Protocol	LoRaWAN®, Milesight D2D	---
Frequency	CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4	
Tx Power	16 dBm (868 MHz)/20 dBm (915 MHz)/19 dBm (470 MHz)	
Sensitivity	-137 dBm @300bps	
Mode	OTAA/ABP Class C	
Ethernet Transmission		
Ethernet Port	-	1 × RJ45 10/100 Mbps (PoE PD)

Ethernet Isolation		1.5 kV RMS
Network Protocol		MQTT(s), HTTP(s), RTSP, NTP, SSH, BACnet/IP, etc.
Other Interfaces		
Wi-Fi	IEEE 802.11 b/g/n, 2.4GHz (AP Mode for Configuration)	-
DI/DO	-	1 × DI, 1 × DO
Serial Interface	-	1 × RS485 (Under development)
Button	1 × Reset Button,1 × Wi-Fi Button	1 × Reset Button
LED Indicators	1 × Status	
Power Input	-	2-pin 3.5 mm Terminal Block
Physical Characteristics		
Power Supply	Type-C 5V/ 3A DC	- 5V/3A DC by Terminal Block - 802.3af PoE
Power Consumption	9.4W	- DC: 7.6W - POE: 8.2W
Ingress Protection	IP30	
Housing	PC + Cast Aluminium	
Color&Weight	White/Black (Optional), 130g	White, 178.6g
Dimension	85 × 85 × 20 mm (3.35 × 3.35 × 0.79 in)	85 × 85 × 30 mm (3.35 × 3.35 × 1.18 in)
Installation	Ceiling Mounting	
Environment&Reliability		
Regulatory	CE, FCC, SRRC GDPR	CE, FCC, GDPR
Environmental	RoHS	
Operating Temperature	-20°C ~ +60°C	
Relative Humidity	0 ~ 95% (Non-condensing)	

◆ Installation Height and Detection Range

To better utilize the advantage of AI algorithm, it's recommended to follow the below installation heights:

Object	Height	Note
Sitting object	>2.5 m (8.2ft)	Commonly used for region people counting
Standing object	> 3 m (9.8ft) (the optimum height is 3m)	Commonly used for line cross counting

It's recommended to refer to below detection ranges[2] for people counting at different heights for accurate recognition:


Installation Height (m)	Detection Range (m^2)
2.0	4.4 × 1.8
2.3	7.4 × 2.8
2.5	9.6 × 3.6
2.7	10.7 × 4.3
3.0	12.3 × 5.0
3.2	14.7 × 6.0
3.5	18.6 × 7.6
4.0	19.3 × 8.3

[1] Tested for line-crossing detection within the recommended detection range.


[2] The actual detection range may vary based on the height of the target individual.


◆ Dimensions (mm)

VS121：

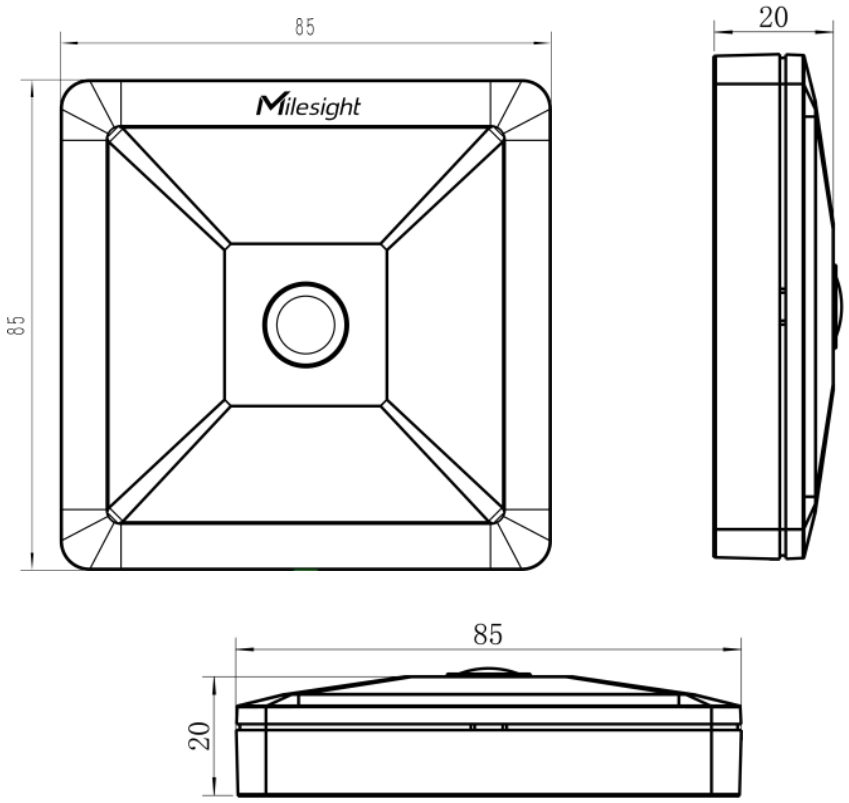

VS121-P：

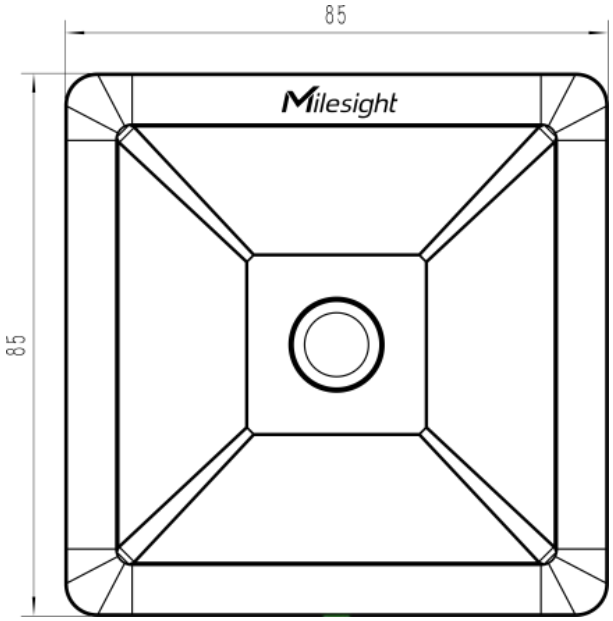

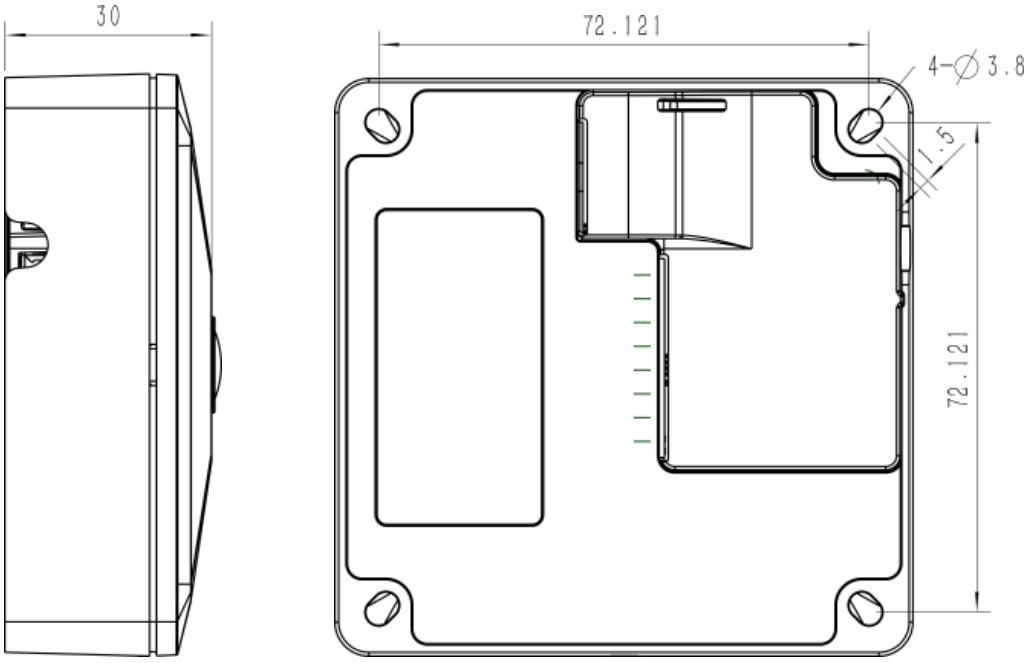

Tel: 86-592-5085280
Sales email: iot.sales@milesight.com
Support email: iot.support@milesight.com
Website: www.milesight.com
Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China